



ENVIRONMENTAL AND HEALTH DECLARATION SHEET (FDES)

In compliance with EN 15804+A2 and its national supplement NF EN 15804 + A2/CN

In compliance with ISO 14025

On-site NHL 3.5-based lime mortar for plastering.
Chaux de Saint Astier - CSA



Registration number: 20240237049

Publication date: 18/04/2024

Version 1



Warning

French regulations:

In France, an environmental declaration (notice disclosing environmental aspects) has been mandatory for producer-to-consumer marketing of products intended for the construction industry.

Declarations must be compliant with standards NF EN 15804+A2 and NF EN 15804/CN, applied over the entire life cycle, and are called Environmental and Health Declaration Sheet (FDES).

FDES ≈ EPD on full life cycle (EN 15804+A2)+health information (NF EN 15804+A2/CN)

These FDES provide information about the product's entire life cycle, as well as additional health-related information and have been integrated into the INIES database (www.inies.fr).

Foreword:

The information contained in this declaration is provided under the responsibility of Chaux de Saint Astier (CSA) in accordance with EN 15804+A2 and the national supplement NF EN 15804 + A2 /CN.

Any use, total or partial, of the information provided in this document must at least be accompanied by a full reference to the original FDES and to its producer, who will be able to provide a complete copy.

Please note that the results of the study are based solely on the facts, circumstances and assumptions submitted during the course of the study. If these facts, circumstances and assumptions differ, the results may change.

Furthermore, the results of the study should be considered as a whole, in the light of the assumptions made, and not taken individually.

CEN standard EN 15804+A2 is used as the Product Category Definition Rules (PCR) (October 2019).

Reading guide

The display of inventory data meets the requirements of EN 15804+A2.

In the following tables 2.53E-06 should be read: 2.53×10^{-6} (scientific writing).

The units used are specified in front of each flow:

- the kilogram "kg",
- the gram "g",
- litre "l",
- the kilowatt-hour "kWh",
- the megajoule "MJ"

Abbreviations :

- LCA : Life Cycle Assessment
- RSL : Reference service life
- FU : Functional Unit
- LHV : Lower Heat Value

How to use the FDES to compare products

Construction product FDES may not be comparable if they do not comply with EN 15804+A2.

The EN 15804+A2 standard defines in § 5.3 *Comparability of construction products*, the conditions under which construction products can be compared, on the basis of the information provided by the FDES:

"A comparison of the environmental performance of construction products using EPD information must be based on the use of the products and their impacts on the building, and must take into account the entire life cycle (all information modules)."

CONTENTS

Introduction	4
1 General information	5
1. Name and address of declarant	5
2. Representativeness of the FDES.....	5
3. Commercial reference.....	5
4. Type of FDES.....	5
5. Distribution circuit.....	5
6. Validity end date :	5
7. Checking :	5
2 Functional unit and product description	6
1. Functional unit description :.....	6
2. Product description :	6
3. Description of product use	6
4. Main performance of the functional unit :.....	6
5. Masses and basic data for calculating the functional unit.....	6
6. Substances on REACH candidate list (if greater than 0.1% by mass).....	7
7. Description of reference service life (if applicable and in accordance with §7.2.2 of EN 15804+A2)	7
8. Information on biogenic carbon content	7
3 Lifecycle stages.....	8
1. Production stage, A1-A3.....	9
1. Construction stage A4-A5.....	9
2. Use stage B1-B7	10
3. End-of-life stage C1-C4 :	11
4. Benefit and load D.....	11
4 Lifecycle analysis calculation information	12
5 Lifecycle analysis results	13
6 Additional information on hazardous substances released into indoor air, soil & water during the period of use	21
7 Product contribution to indoor quality of life.....	21
BIBLIOGRAPHY	22

INTRODUCTION

The framework used to present the environmental product declaration is based on the national supplement NF EN 15804+A2/CN.

This data sheet provides a suitable framework for presenting the environmental characteristics of construction products in accordance with the requirements of standard EN 15804+A2, its national supplement NF EN 15804+A2/CN, and for providing comments and useful additional information in keeping with the spirit of this standard in terms of sincerity and transparency.

The information contained in this declaration is provided under the responsibility of Chaux de Saint Astier (CSA), owner of the declaration. This declaration is valid for the sole production site of Chaux de CSA located in Saint Astier (24), France.

The declaration was made by:  contact: Marion Chirat (m.chirat@karibati.com).

Contact:

Laurent TEDESCHI
Technical Manager

Contact details :

+33 (0)5 53 54 11 25

l.tedeschi@saint-astier.com

Company details :

Chaux de Saint Astier CSA
28 Bis Route de Montanceix - La Jarthe - 24 110 SAINT-ASTIER
[CHAUX de SAINT-ASTIER® : l'Excellence pour la Vie](#)

1 GENERAL INFORMATION

1. Name and address of declarant

The owner of the declaration is the company "Chaux de Saint Astier" located : Lieu dit la Jarthe, 24110 Saint Astier. France

2. FDES representation

This FDES is valid for NHL 3.5 lime mortar produced by Chaux de Saint Astier in Saint Astier (24) for use in on-site rendering (site mortar as defined in NF DTU 26.1).

3. Commercial reference

Lime mortar is made from natural hydraulic lime NHL 3.5 to NF EN 459-1 under the trade name CHAUX PURE BLANCHE LC****®.

4. Type of ESDS

This individual FDES covers the "cradle-to-grave" stages. Module D is included.

5. Distribution channels

This FDES is intended for B2B and/or B2C communication.

6. Expiry date :

This FDES was published on April 18th, 2024 and is valid for 5 years.

7. Verification :

Program operator: INIES database

<http://www.inies.fr/>

Since 2011, the HQE association has been acting as owner-manager of the building.

INIES database. (Association HQE: 4, avenue du Recteur Poincaré 75016 PARIS).



NF EN 15804+A2 (October 2019) and NF EN 15804+A2/CN (October 2022) serve as RCP standards^a

Independent external verification of declaration and data in accordance with EN ISO 14025:2010.

Third-party verification^b :

Mr. Clément Bolle, WeLOOP

254 rue du bourg, 59130 Lambersart , France

Tel: +33 7 81857682

Email: c.bolle@weloop.org

Website: www.weloop.org

^a Rules for defining product categories.

^b Optional for business-to-business communication, mandatory for business-to-customer communication (see EN ISO 14025:2010, 9.4).

INIES registration number: **20240237049**

Date of 1^{ère} publication: 18/04/2024

2 FUNCTIONAL UNIT AND PRODUCT DESCRIPTION

1. Functional unit description :

"Cover 1m² of substrate with a 10 mm thick coating of NHL 3.5 lime mortar , ensuring the performances described in the relevant Eurocodes and NF DTU. The product has a reference service life of 50 years.

2. Product description :

The product studied here is a lime mortar made from NHL 3.5 lime produced by Chaux de Saint Astier.

Lime mortar is a mixture of NHL 3.5 lime, sand and water.

3. Description of product use :

This is a mixture traditionally used for rendering, made up of NHL 3.5 lime (15 to 20% by mass) and 0/2 or 0/4 sand before adding water.

4. Main performance of the functional unit :

Lime mortar is used as a coating. It has a density of around 2000 kg/m³ when mixed. The dry rendering has a density of around 1800 kg/m³.

5. Masses and basic data for calculating the functional unit

Parameter	Units	Value
Product quantity	kg/FU	Density: 2000 kg/m ³ NHL 3.5 lime: 3.28 Sand: 13.6
Quantity of complementary products (during implementation)	L/FU	Water: 3.12
Distribution packaging	g/FU	For the binder, use kraft bags with plastic lining containing 25kg of binder, i.e. for the UF : Kraft: 13.12 PE: 1.312 55 bags per pallets, i.e. : Pallets: 0.0024 units
Losses during installation	%	<1%
Justification of information provided		Information supplied by Chaux de Saint Astier (CSA)

6. Substances on REACH candidate list (if greater than 0.1% by mass)

The product does not contain any products on the REACH candidate list.

7. Description of reference lifetime (if applicable and in accordance with §7.2.2 of EN 15804+A2)

Parameters	Values
Reference service life	50 years old.
Declared product properties and finishes, etc.	This information is defined in the product definition standard or technical documentation: NF EN 998-1 "Definitions and specifications for masonry mortars - Part 1: exterior and interior mineral rendering mortars".
Theoretical application parameters including references to appropriate practices	This information is defined in the Eurocodes and, in France, in NF DTU 26.1 "Travaux de bâtiment - Travaux d'enduits de mortiers".
Presumed quality of work when installation complies with manufacturer's instructions	
Outdoor environment (for outdoor applications)	
Indoor environment (for indoor applications)	
Terms of use	
Maintenance	


8. Information on biogenic carbon content

The binder packaging made of kraft paper and the pallet store biogenic carbon.

Biogenic carbon content	Unit	Values
Biogenic carbon content of product (ex-works)	kg.C/FU	0
Biogenic carbon content of associated packaging (ex works)	Kg.C/FU	0,089

3 LIFECYCLE STAGES

The product life cycle is shown below:

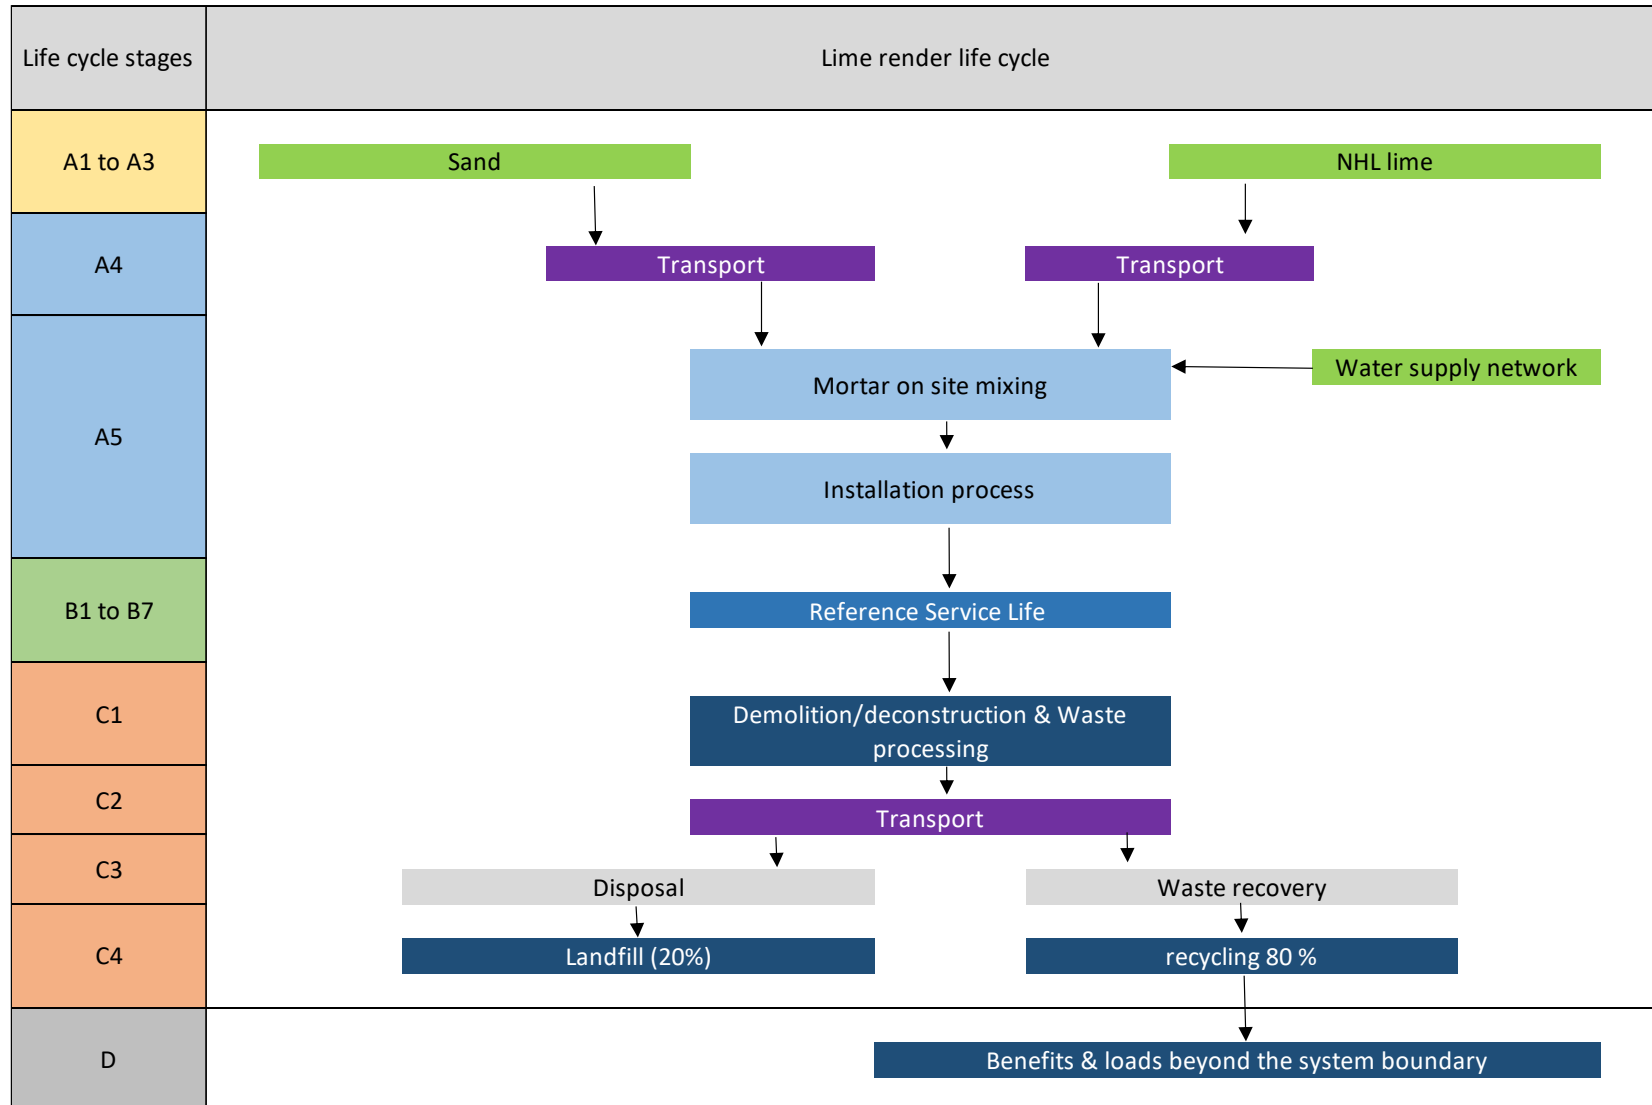

Production stage	production process stage		Life stage in use							End-of-life stage				Benefits and costs beyond system boundaries
Product	Transport	Construction / Installation process	Use	Maintenance	Repair	Replacement	Refurbishment	Use of energy	Water usage	Deconstruction / Demolition	Transport	Waste processing	diposal	Possibility of reuse, recovery, recycling
A1 - A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	X	X	X	X	X	X	X	X	X	X	X	X

1. Production stage, A1-A3

MODULE A1: Raw materials

All the raw materials making up lime mortar are taken into account at this stage.

- For NHL3.5 lime: Extraction of limestones from the Saint-Astier lime quarry, transport to the site, and manufacture of NHL3.5 lime on the Saint-Astier lime site (dedicated kiln);
- Sand extraction and production;

MODULE A2: Raw materials transportation

The raw material shipments taken into account at this stage are :

- For sand: transport by barge and then by truck to supply the depots;

MODULE A3: Manufacturing

There are no manufacturing steps for this FDES as the mortar is made on site.

1. Construction stage A4-A5

Module A4: Transport to the job site

Lime and sand are transported separately, directly from their respective manufacturing/storage sites to the construction site. They are loaded onto :

- flatbed semi-trailers for lime bags for delivery to dealers, then in 16T trucks for delivery to the worksite
- dump trucks for sand;

For on-site supply :

Parameter	Value
Type of vehicle for transporting lime to trade outlets	32 T EURO 6 truck
Delivery distance to lime merchants	325 km
Type of vehicle for transport to site (lime)	Truck 16-32T EURO 6
Delivery distance to site (lime)	25 km
Type of vehicle for sand transport	40 T EURO 6 truck
Delivery distance (sand)	40 km

Module A5: Installation process

Lime mortar is applied directly on site.

Most NHL mortar is prepared on site in electric or thermal concrete mixer.

Parameter	Value
Water consumption for processing	Water: 312 L/m ³ mortar. Note: On-site sand is never dry. Water quantities for mixing are usually less than 312 L/m ³ .
Energy consumption and type for processing	Diesel: 0.152 kWh/m ² mortar (mixer + processing equipment) Electricity: 0.00826 kWh/m ² of mortar
Product packaging waste from the processing stage	Lime bags: 1.443.10 ⁻² kg/m ² Lime bag Pallets: 4.55.10 ⁻³ kg/m ² The end-of-life scenario for packaging waste (kraft paper) is based on a French scenario derived from Ecoinvent data. The scenario for pallets follows the one defined by CODIFAB in 2022 for wood.
Losses during installation	0,4%
Direct emissions into ambient air, soil and water	No

2. Use stage B1-B7

Module B1: Use of the installed product

The product has no impact on this stage, as no maintenance is required during its working life.

On the other hand, during its working life, lime mortar will carbonate. Carbon dioxide present in the atmosphere penetrates the mortar from the surface of the material. This is a chemical process whereby carbon dioxide from the ambient air reacts with the Ca(OH)₂ contained in the lime mortar.

The quantity absorbed is linked to the amount of reactive CaO present in the lime. It is calculated in accordance with the recommendations of standard NF EN 16757 (June 2017) "Contribution of construction works to sustainable development - Environmental product declarations - Rules governing the product category for concrete and concrete elements".

In the case of this FDES, for the lime mortar studied, the strength is less than 15 MPa, and this lime mortar is notably intended for the production of uncoated finishing plaster inside or outside buildings. Considering interior use, the k factor used here is equal to 16.5 as defined in standard NF EN 16757.

Interior	k-factor value
Uncoated	16,5

Inside: The lime mortar will be carbonated to a maximum thickness of 117 mm after 50 years.

With a plaster thickness of 10 mm, CO₂ absorption will reach 1.04 kgCO₂/m² during the working life (carbonation degree at 75%).

Under normal conditions of use, lime mortar requires no repair, maintenance, water or energy during its life cycle.

3. End-of-life stage C1-C4 :

Before it can be processed at the end of its life, it must first be recovered from the building. This operation is carried out using "chisel" type tools in the case of demolition.

The amount of electrical energy associated with this method is included in the study.

The scenario chosen for end-of-life treatment is that used by the concrete industry for ready-mix concrete (source: BETIE¹):

- Landfill: 25 %
- Valuation: 75%.

The reuse scenario for end-of-life lime concrete is detailed in section "3.5. Recycling/reuse/recovery potential, D".

Parameter	Units	Value/description
Quantity collected separately	kg	18
Quantity collected with mixed construction waste	kg/FU	0
Quantity for reuse	%	0
Quantity for recycling	%	75
Quantity for energy recovery	%	0
Quantity of product landfilled	%	25
Transport distance to incineration site	km	0
Transport distance to landfill	km	30
Transport distance to sorting center for reuse	km	50

4. Benefits and load, D

Benefits and load beyond the system's boundaries are taken into account, as the product is partly valorised.

Recovered materials leaving system boundaries	Recycling processes beyond system boundaries	Materials/energy saved	Associated quantities
Crushed lime plaster	Road embankments	Gravel	75% or 13.5 kg

¹ [Carbon Footprint of Concrete - SNBPE](#)

4 LIFE CYCLE ASSESSMENT CALCULATION INFORMATION

PCR used	EN 15804+A2 and NF EN 15804+A2/CN.
Cut-off rule	The cut-off rule used in this FDES is that defined in EN 15804+A2.
System boundaries	System boundaries comply with the limits imposed by standard EN 15804+A2 and its national supplement NF EN 15804+A2/CN. The flows not taken into account are : - Construction of processing plants, including manufacturing machinery; - Workshop cleaning ; - Electricity consumption by administrative departments ; - Transportation of employees to the production site;
Allowances	No allocation on the Saint Astier site as there is an industrial line dedicated to the manufacture of NHL 3.5 lime. Allocations for end-of-life packaging waste (kraft paper) are based on a French scenario derived from Ecoinvent data. The scenario for pallets follows the one defined by CODIFAB in 2022 for wood. Other allocations from the database remain intact.
Quality of the main data used to produce the LCI - Specific data	Assessment of the quality of the main specific data shows a majority of data with an average rating of "very good" or "good". A few data received an "average" rating.
Quality of the main data used to produce the LCI - Generic data	Generic data received an average rating of "good".
Geographical and temporal representativeness of primary data	Software used: SimaPro life cycle analysis software (V9.3). The product in question is a French product, intended for the French market, and is representative of French lime rendering mortars. Primary data was collected in 2021-2022 from Chaux de Saint Astier. One year was taken into account for LCI data on NHL 3.5 lime. Secondary data is taken from the Ecoinvent v3.8 (2021) database. The LCI for NHL 3.5 Lime, dating from the end of 2022 and modeled in NF EN 15804+A1 format was used in inventory form (CSV format) for use in this EN 15804+A2 modeling. No data has been overlooked.
Variability of results	Not applicable

5 LIFECYCLE ANALYSIS RESULTS

Environmental impact	Production stage			Production process stage		Life stage in use							End-of-life stage				D Profits and expenses beyond system boundaries
	A1 Raw materials extraction	A2 Transport	A3 Manufacturing	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Energy use	B7 Water use	C1 Deconstruction/ demolition	C2 Transport	C3 Waste treatment	C4 Disposal	
Climate change total kg CO ₂ eq/FU	1,87E+00	2,67E-02	0,00E+00	1,63E-01	8,42E-02	-1,04E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,08E-02	1,43E-01	1,68E-02	-4,95E-02	-6,21E-02
Climate change - Fossil fuels kg CO ₂ eq/FU	1,90E+00	2,66E-02	0,00E+00	1,62E-01	5,32E-02	-1,04E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,99E-02	1,43E-01	1,67E-02	-4,96E-02	-6,12E-02
Climate change - biogenic kg CO ₂ eq/FU	-3,02E-02	5,85E-05	0,00E+00	1,49E-04	3,10E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,99E-04	1,39E-04	1,91E-05	5,30E-05	-8,85E-04
Climate change - land use and land use change kg CO ₂ eq/FU	3,13E-04	5,58E-05	0,00E+00	8,27E-05	7,60E-06	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,20E-05	5,14E-05	5,41E-06	3,06E-05	-2,32E-05
ozone Depletion kg CFC 11 eq/FU	5,45E-08	4,87E-09	0,00E+00	3,94E-08	1,10E-08	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,21E-09	3,41E-08	1,16E-08	1,26E-08	-1,31E-08
Acidification mol H ⁺ eq/FU	4,10E-03	2,66E-04	0,00E+00	5,31E-04	5,35E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,95E-04	5,96E-04	5,64E-04	3,07E-04	-4,52E-04
Aquatic Eutrophication, fresh water kg P eq/FU	4,73E-05	3,07E-07	0,00E+00	1,39E-06	2,73E-07	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,01E-06	9,77E-07	1,80E-07	4,28E-07	-3,51E-07
Marine aquatic eutrophication kg N eq/FU	9,40E-04	1,15E-04	0,00E+00	1,14E-04	2,34E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,68E-05	1,80E-04	2,49E-04	1,07E-04	-1,67E-04

Terrestrial eutrophication mol N eq/FU	1,08E-02	1,27E-03	0,00E+00	1,26E-03	2,56E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,82E-04	1,99E-03	2,74E-03	1,18E-03	-1,91E-03
Photochemical ozone formation kg NMVOC eq/FU	2,98E-03	3,26E-04	0,00E+00	5,00E-04	7,05E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,05E-04	6,40E-04	7,52E-04	3,40E-04	-5,22E-04
Depletion of abiotic resources - fossil fuels MJ/FU	1,20E+01	3,43E-01	0,00E+00	2,62E+00	8,14E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,77E+00	2,23E+00	7,44E-01	8,72E-01	-9,57E-01
Depletion of abiotic resources - minerals and metals kg Sb eq/FU	1,59E-06	4,83E-08	0,00E+00	6,75E-07	5,96E-08	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,97E-07	3,28E-07	2,79E-08	1,04E-07	-5,66E-07
Water requirements m3 depriv./FU	7,22E-01	1,44E-03	0,00E+00	1,09E-02	1,36E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,37E-02	7,67E-03	1,16E-03	3,07E-02	-3,00E-02

environmental impacts	Production stage			Production process stage		Life stage in use							End-of-life stage				D Profits and expenses beyond system boundaries
	A1 Raw materials extraction	A2 Transport	A3 Manufacturing	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Energy use	B7 Water use	C1 Deconstruction /demolition	C2 Transport	C3 Waste treatment	C4 Disposal	
Fine particle emissions disease index/FU	4,85E-08	5,94E-10	0,00E+00	1,82E-08	1,41E-08	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,75E-10	1,68E-08	1,15E-07	5,94E-09	-1,03E-08
Ionizing radiation, human health kBq U-235 eq/FU	2,77E-02	1,56E-03	0,00E+00	1,12E-02	4,09E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,85E-02	9,66E-03	3,17E-03	3,66E-03	-6,37E-03
Exotoxicity (freshwater) CTUe/FU	1,76E+01	2,64E-01	0,00E+00	2,21E+00	4,57E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,26E+00	1,74E+00	4,35E-01	5,91E-01	-9,13E-01
Human toxicity, carcinogenic effects CTUh/FU	2,98E-10	1,37E-11	0,00E+00	7,64E-11	2,21E-11	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,43E-11	4,81E-11	1,68E-11	1,87E-11	-5,51E-11
Human toxicity, non carcinogenic CTUh/FU	7,24E-09	1,49E-10	0,00E+00	2,32E-09	3,80E-10	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,72E-10	1,90E-09	3,16E-10	4,66E-10	-9,55E-10
Impacts of land use soil/soil quality MJ LHV/FU	1,98E+01	2,66E-01	0,00E+00	2,82E+00	1,20E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,76E-01	2,55E+00	9,47E-02	1,56E+00	-1,36E+00

Resources use	Production stage			Production process stage		Life stage in use							End-of-life stage				D Profits and expenses beyond system boundaries
	A1 Raw materials extraction	A2 Transport	A3 Manufacturing	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Energy use	B7 Water use	C1 Deconstruction /demolition	C2 Transport	C3 Waste treatment	C4 Disposal	
Use of renewable primary energy, excluding renewable primary energy resources used as raw materials MJ LHV/FU	5,82E-01	8,91E-03	0,00E+00	3,70E-02	8,21E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,99E-01	2,84E-02	4,18E-03	1,12E-02	-1,50E-01
Use of renewable primary energy resources as raw materials MJ LHV/FU	8,07E-01	0,00E+00	0,00E+00	0,00E+00	-8,07E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ LHV/FU	1,39E+00	8,91E-03	0,00E+00	3,70E-02	1,44E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,99E-01	2,84E-02	4,18E-03	1,12E-02	-1,50E-01
Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials MJ LHV/FU	1,57E+01	3,54E-01	0,00E+00	2,66E+00	8,17E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,86E+00	2,24E+00	7,41E-01	8,82E-01	-9,68E-01
Use of non-renewable primary energy resources as raw materials MJ LHV/FU	1,11E-03	0,00E+00	0,00E+00	0,00E+00	-1,11E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ LHV/FU	1,57E+01	3,54E-01	0,00E+00	2,66E+00	8,16E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,86E+00	2,24E+00	7,41E-01	8,82E-01	-9,68E-01

Use of secondary materials kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels MJLHV/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels MJ LHV /FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net freshwater use m ³ /FU	1,87E-02	6,18E-05	0,00E+00	3,22E-04	3,21E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,64E-03	2,40E-04	3,15E-05	7,33E-04	-1,93E-02

Waste category	Production stage			Production process stage		Life stage in use							End-of-life stage				D Profits and expenses beyond system boundaries
	A1 Raw materials extraction	A2 Transport	A3 Manufacturing	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Energy use	B7 Water use	C1 Deconstruction/demolition	C2 Transport	C3 Waste treatment	C4 Disposal	
Hazardous waste disposed kg/FU	1,25E-02	4,85E-04	0,00E+00	2,47E-03	7,04E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,81E-03	1,54E-03	5,90E-04	6,88E-04	-2,04E-03
Non-hazardous waste disposed kg/FU	5,55E-01	4,51E-03	0,00E+00	2,48E-01	8,58E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,12E-02	2,20E-01	3,10E-03	4,52E+00	-5,21E-02
Radioactive waste disposed kg/FU	3,77E-05	2,29E-06	0,00E+00	1,74E-05	6,22E-06	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,68E-05	1,51E-05	5,14E-06	5,73E-06	-7,03E-06

Output flows		production stage			production process stage		Life stage in use							End-of-life stage				D Profits and expenses beyond system boundaries
		A1 Raw materials extraction	A2 Transport	A3 Manufacturing	A4 Transport	A5 Installation	B1 Use	B2 Maintenance	B3 Repair	B4 Replacement	B5 Refurbishment	B6 Energy use	B7 Water use	C1 Deconstruction/ demolition	C2 Transport	C3 waste processing	C4 Disposal	
Components for reuse kg/FU		0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,66E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Materials for recycling kg/FU		0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,03E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,35E+01	0,00E+00	0,00E+00
Materials for energy recovery kg/FU		0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Energy supplied externally (by energy vector) MJ/FU	Electricity	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,63E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	Steam	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,40E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
	Process gas	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Impact/flow category	Unit	Total Manufacturing	Total Implementation	Total Life cycle	Total End of life	Total Lifecycle
Climate change - total	kg CO ₂ eq/FU	1,89E+00	2,47E-01	-1,04E+00	1,51E-01	1,25E+00
Climate change - fossil fuels	kg CO ₂ eq/FU	1,92E+00	2,16E-01	-1,04E+00	1,50E-01	1,25E+00
Climate change - biogenic	kg CO ₂ eq/FU	-3,02E-02	3,11E-02	0,00E+00	1,01E-03	1,97E-03
Climate change - land use and land use change	kg CO ₂ eq/FU	3,69E-04	9,03E-05	0,00E+00	1,09E-04	5,69E-04
Ozone Depletion	kg CFC11 eq/FU	5,94E-08	5,04E-08	0,00E+00	6,25E-08	1,72E-07
Acidification	mol H ⁺ eq/FU	4,37E-03	1,07E-03	0,00E+00	1,66E-03	7,09E-03
Aquatic eutrophication, freshwater	kg P eq/FU	4,76E-05	1,67E-06	0,00E+00	2,60E-06	5,19E-05
Marine aquatic eutrophication	kg N eq/FU	1,06E-03	3,47E-04	0,00E+00	5,73E-04	1,98E-03
Terrestrial Eutrophication	mol N eq/FU	1,21E-02	3,83E-03	0,00E+00	6,28E-03	2,22E-02
Photochemical ozone formation	kg NMVOC eq/FU	3,30E-03	1,20E-03	0,00E+00	1,84E-03	6,35E-03
Depletion of abiotic resources - minerals and metals	kg Sb eq/FU	1,23E+01	3,44E+00	0,00E+00	9,61E+00	2,54E+01
Depletion of abiotic resources - fossil fuels	MJ PCI/FU	1,64E-06	7,35E-07	0,00E+00	8,56E-07	3,23E-06
Water requirements	m ³ depriv. /FU	7,23E-01	1,47E-01	0,00E+00	5,32E-02	9,24E-01
Fine particle emissions	disease index/FU	4,91E-08	3,23E-08	0,00E+00	1,39E-07	2,21E-07
Ionizing radiation, human health	kBq U-235 eq/FU	2,93E-02	1,53E-02	0,00E+00	7,50E-02	1,20E-01
Exotoxicity (freshwater)	CTUe/FU	1,78E+01	2,67E+00	0,00E+00	4,02E+00	2,45E+01
Human toxicity, carcinogenic effects	CTUh/FU	3,11E-10	9,85E-11	0,00E+00	1,08E-10	5,18E-10
Human toxicity, non-carcinogenic effects	CTUh/FU	7,38E-09	2,70E-09	0,00E+00	3,16E-09	1,32E-08
Impacts of land use/soil quality	MJ LHV/FU	2,01E+01	2,94E+00	0,00E+00	4,38E+00	2,74E+01
Use of renewable primary energy, excluding renewable primary energy resources used as raw materials	MJ LHV/FU	5,91E-01	8,58E-01	0,00E+00	4,42E-01	1,89E+00
Use of renewable primary energy resources as raw materials	MJ LHV/FU	8,07E-01	-8,07E-01	0,00E+00	0,00E+00	3,81E-04
Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ LHV/FU	1,40E+00	5,14E-02	0,00E+00	4,42E-01	1,89E+00
Use of non-renewable primary energy, excluding non-renewable primary energy resources used as raw materials	MJ LHV/FU	1,61E+01	3,48E+00	0,00E+00	9,73E+00	2,93E+01
Use of non-renewable primary energy resources as raw materials	MJ LHV/FU	1,11E-03	-1,11E-03	0,00E+00	0,00E+00	5,25E-07
Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials)	MJ LHV/FU	1,61E+01	3,48E+00	0,00E+00	9,73E+00	2,93E+01
Use of secondary materials	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of renewable secondary fuels	MJ LHV/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Use of non-renewable secondary fuels	MJ LHV/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net freshwater use	m ³ /FU	1,88E-02	3,53E-03	0,00E+00	2,65E-03	2,50E-02
Hazardous waste disposed	kg/FU	1,30E-02	3,17E-03	0,00E+00	4,63E-03	2,08E-02
Non-hazardous waste disposed	kg/FU	5,59E-01	3,34E-01	0,00E+00	4,76E+00	5,65E+00
Radioactive waste disposed	kg/FU	3,99E-05	2,36E-05	0,00E+00	1,03E-04	1,66E-04
Components for reuse	kg/FU	0,00E+00	2,66E-04	0,00E+00	0,00E+00	2,66E-04
Materials for recycling	kg/FU	0,00E+00	1,03E-02	0,00E+00	1,35E+01	1,35E+01
Materials for energy recovery	kg/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Energy supplied externally (electricity)	MJ/FU	0,00E+00	6,63E-03	0,00E+00	0,00E+00	6,63E-03
Energy supplied externally (steam)	MJ/FU	0,00E+00	1,40E-02	0,00E+00	0,00E+00	1,40E-02
Energy supplied externally (gas)	MJ/FU	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

6 ADDITIONAL INFORMATION ON THE RELEASE OF HAZARDOUS SUBSTANCES INTO INDOOR AIR, SOIL AND WATER DURING THE PERIOD OF USE

Indoor air :

The product is not in direct contact with indoor air.

The lime used to make the concrete is certified Excell+.

Soil and water :

Not applicable, as this product does not come into contact with water intended for human consumption, runoff, seepage, groundwater or surface water.

7 PRODUCT CONTRIBUTION TO INDOOR QUALITY OF LIFE

Product characteristics contributing to the creation of hygrothermal comfort conditions in the building:

Lime rendering mortars are naturally permeable to water vapour, contributing to the building's hygrothermal comfort.

Product features contributing to the creation of acoustic comfort conditions in the building :

No tests carried out.

Product features contributing to the creation of visual comfort conditions in the building:

The colours and textures provided by lime render mortars contribute to the visual comfort of the building.

Product characteristics contributing to the creation of olfactory comfort conditions in the building:

The product is odourless.

BIBLIOGRAPHY

This EHSF is based on the following standard documents:

- AFNOR, *Norme NF EN ISO 14040, Analyse du cycle de vie / Principes et cadre*, Octobre 2006 ;
- AFNOR, *Norme NF EN ISO 14044, Analyse du cycle de vie / Exigences et lignes directrices*, Octobre 2006 ;
- AFNOR, *Norme EN 15804+A2, Contribution des ouvrages de construction au développement durable - Déclarations environnementales sur les produits - Règles régissant les catégories de produits de construction*, Octobre 2019 ;
- AFNOR, *Norme NF EN 15804+A2 /CN, Contribution des ouvrages de construction au développement durable - Déclarations environnementales sur les produits - Règles régissant les catégories de produits de construction*
- *Complément national à l'EN 15804+A2*, October 2022;

An accompanying report describing the modeling and its main assumptions was submitted with the FDES for verification.